


Slanted double wall insert for setting in concrete

HSI90 1xZ K2 S_°/X



- **3-ribbed seal is sprayed on to create pressure-tight seal with concrete**

For slanted cable entries from any direction and an optimum bending radius when feeding in and sealing cables or when connecting cable ducts.

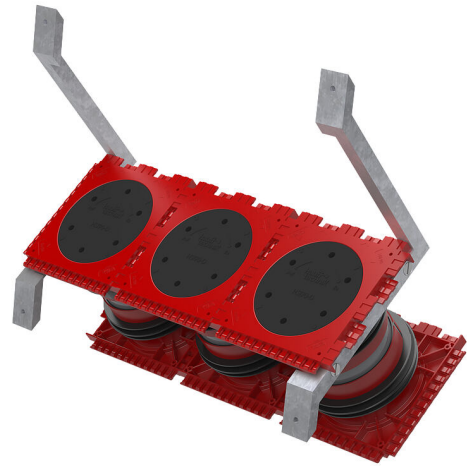

Picture may differ from selected product

FACTS

Advantages:

- System seal can be connected on both sides (e.g. cable duct connection and cable seal)
- Item is delivered ready to install for installation flush with formwork
- Packages can be created ex works (single row)
- Cable entry in a single angle 30°/45°

Scope of delivery:

- 2 pieces of polystyrene wedges
- Attachment frame
- 2 pieces of pressure-tight closing covers

Dimensions:

- Centre distance: 135 mm



Properties:

- Attention! The special solution used for the inclined building entry may mean that the specified minimum wall thickness for waterproof concrete walls is undershot.

Application range:

- Waterproof concrete stress class 1 and 2

Material:

- Wall insert: ABS with TPE 3-ribbed seal
- Adapter pipe: PVC
- Closing cover: ABS with EPDM seal
- Attachment frame: steel St37
- Polystyrene wedge

Tightness:

- gastight and watertight to 2.0 bar
- radon tight

DIN:

- Waterproof concrete stress class 1 and 2